

Matrix CL4330


Die-Cast Aluminium Housing



Number of Power LED's / Rating / Current	Luminaire Output Flux (lm)		W (mm)	L (mm)	h (mm)	Item / Box	Average Weight (kg)	Order Code	System Lumen / W (lm)	
	max.	min.							max.	min.
64 / 70W - 350 mA	10500	8050	876	228	91	1	10.00	L4330-LED0070NW-ECG	150	115
64 / 100W - 500 mA	15000	11500	876	228	91	1	10.00	L4330-LED0100NW-ECG	150	115
64 / 140W - 700 mA	21000	16100	876	228	91	1	10.00	L4330-LED0140NW-ECG	150	115
64 / 190W - 925 mA	28500	21850	876	228	91	1	10.00	L4330-LED0190NW-ECG	150	115
64 / 215W - 1050 mA	32250	24725	876	228	91	1	10.00	L4330-LED0215NW-ECG	150	115
128 / 145W - 350 mA	21750	16675	876	228	91	1	10.00	L4330-LED2145NW-ECG	150	115
128 / 205W - 500 mA	30750	23575	876	228	91	1	10.00	L4330-LED2205NW-ECG	150	115
128 / 290W - 700 mA	43500	33350	876	228	91	1	10.00	L4330-LED2290NW-ECG	150	115

Depending on the luminaire configuration. For more details, please contact us.
Tolerance on LED flux is +/-7% and on total luminaire power +/- 5%.

Main Applications

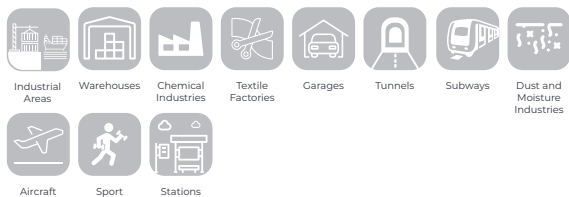

www.cemdag.com
cemdag@cemdag.com

Cemdag reserve the right to modify design and/or production characteristics of their products. photographs and data used in this catalogue are for illustrative purposes are not binding on the company.

+90 232 444 4 236
CEM

The copying or reproduction, in part or in full, of any descriptions, technical data drawings or photographs shown in this catalogue is expressly forbidden.

